

EN54-24 Ceiling Speaker (6.5" 2-Way) CSK-630KEN

Feature:

- Compliant with the EN54-24 standards fireproof ceiling speaker
- Built-in 100v/70v transformer for PA & VA system
- 100V power taps 30-15-7.5-3.8W & 8Ω
- 100V transformer and 8Ω both applications
- 6.5" woofer and 1" Mylar teeter two way speaker system
- ABS enclosure, metal grille with fire dome in white
- Flush mount in-ceiling quick and secure installation
- Fireproof phoenix terminal, thermal fuse, fire dome and fire-resistant cable





EN54-24

Specification:

Model	CSK-630KEN
Description	EN54-24 Ceiling Speaker
100V Power Taps	30-15-7.5-3.8W & 8Ω
Frequency Response	100-20K Hz
SPL(@1W/m)	88±3dB
Speaker Unit	6.5" woofer and 1" Mylar teeter two way
Cutout Size	Ø 200mm
Dimension	Ø 230×150mm
Material	ABS enclosure, metal grill with fire dome in white
Weight	2.2kg

Dimension & Mounting:

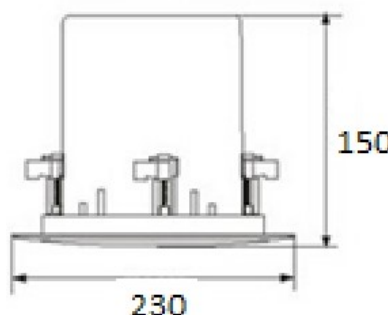

Frequency Response & Impedance Diagrams:

